

60 W External Rotor Motor

DD 025 AA




Motor with fully protected windings (non exposed) and no stamped laminations.

* IP 55 available on request

Motor Type	Input Power W	Speed RPM	Efficiency %	Operating Temperature	Protection IP	Electronic Control
DD 025 AA	Up to 120	0-3500	70	-10/+40°C +14/+104°F	44*	See below

Product Dimensions:

Standard mounting: 4xM4 at 58 mm (2.28 inches) Ø
 Mounting option: 54 mm (2.13 inches) or 71 mm (2.80 inches) Ø

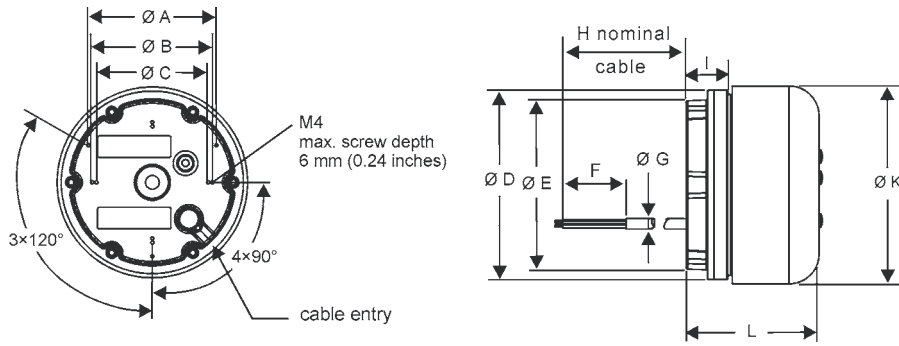

Dimensions	A	B	C	D	E	F	G*	H*	I	K	L
mm	71	58	54	88	78	42	6.2	500	19	92	62
inches	2.80	2.28	2.13	3.46	3.07	1.65	0.24	19.68	0.75	3.62	2.44

Cable Tolerance: G* ±0.8 mm (±0.03 inches)
 H* ±20 mm (±0.79 inches)

Product Performance:

Speed RPM	Input Power W	Torque Nm	Electronic Control
1600	67	0.2	CH 120 AA
1800	71	0.2	
2000	75	0.2	
2200	80	0.2	
2400	85	0.2	
2600	89	0.2	CH 160 AA
2800	94	0.2	
3000	98	0.2	
3200	103	0.2	

Custom control available on request