

160 W External Rotor Motor DD 070 AA



Motor with fully protected windings (non exposed) and no stamped laminations.


* IP 55 available on request



Motor Type	Input Power W	Speed RPM	Efficiency %	Operating Temperature	Protection IP	Electronic Control
DD 070 AA	Up to 235	0-3500	81	-10/+40°C +14/+104°F	44*	See below

Product Dimensions:

Standard mounting: 4xM4 at 58 mm (2.28 inches) Ø
Mounting option: 54 mm (2.13 inches) or 71 mm (2.80 inches) Ø

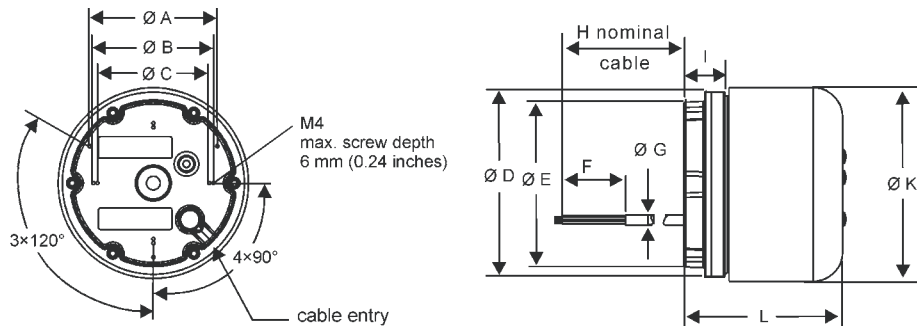

Dimensions	A	B	C	D	E	F	G*	H*	I	K	L
mm	71	58	54	88	78	42	6.2	500	19	92	77
inches	2.80	2.28	2.13	3.46	3.07	1.65	0.24	19.68	0.75	3.62	3.03

Cable Tolerance: G* ±0.8 mm (±0.03 inches)
H* ±20 mm (±0.79 inches)

Product Performance:

Speed RPM	Input Power W	Torque Nm	Electronic Control
1600	120	0.5	CH 250 AB
1800	131	0.5	
2000	143	0.5	
2200	155	0.5	
2400	167	0.5	
2600	174	0.5	
2800	191	0.5	
3000	207	0.5	
3200	215	0.5	

Custom control available on request